



Infiniti

RIGID CORE LVT

Gray Taupe



Quick-Ship Collection

Gray Taupe

Infiniti Quick-Ship Collection by terra legno

SPECIFICATIONS

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

Size: 7" x 60" x 5.5 mm (0.21")

SPC Core Standard Dimensions: 4mm

Commercial Wear Layer: 0.5mm / 20mil

Wear Layer Top-Coat Finish: Polyurethane with Ceramic Beads

Standard Backings: IXPE Foam 1.5mm

Edge: Square Edge

Colors: 12 Standard Colors

Embossed: Yes

Pattern Repeat: 5.67

Installation: Unilin 2G Angle / Tap

Moldings: SlimTrim 3-in-1 & Versa Edge

Packaging: 29.52 S/F Cartons, 10 Planks per Ctn.

Pallet 55 Ctns.

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016) ϵ 1 – IIC 65

INSTALLATION

Methods: Float and Glue Down

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terraleigno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure

Lifetime Limited Waterproof

Lifetime Limited Petproof

Lifetime Limited Residential Wear

30 Year Limited Commercial Wear



CERTIFICATIONS

Phthalate Free

FloorScore

ISO 9001

CONTACT & SAMPLES

For further information and sample requests:


www.terraleigno.com

info@terraleigno.com

P: 800-393-7424

INFINITI LVT CONSTRUCTION

Urethane & Ceramic Bead Finish

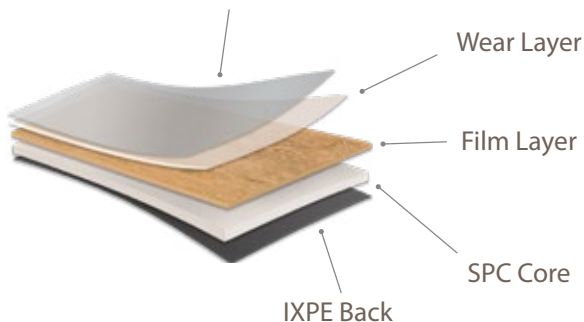

Infiniti
Collection



Product
Page

