Infiniti
RIGID CORE LVT

Pure Sephia

Pure Sephia

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship
Dimensions: 8 2/3" x 74" x 6.5mm
SPC Core Dimensions: 5.5mm
Commercial Wear Layer: 0.5mm / 20mil
Top-Coat Finish: Polyurethane w/ Ceramic Beads
Embossed: Yes
Standard Backing: 1mm IXPE Rubber w/sound properties
Methods: Drop & Lock / Glueless
Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents
Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet
Dimensional Stability: ASTM F2199 - PASSED
Heat Stability: ASTM 1514 - PASSED
Light Stability: ASTM 1515 - PASSED
Residual Indentation: ASTM F1914 - PASSED
Static Load: ASTM F970 - PASSED
Stain Resistance: ASTM F925 - PASSED
Slip Resistance (Static Coefficient of Friction): ≥ 0.5
Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45
Impact Sound Testing: IICc-28 ΔIIC = 23db
STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62
IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65
Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure
Lifetime Limited Waterproof
Lifetime Limited Petproof
Lifetime Limited Residential Wear
30 Year Limited Commercial Wear

CERTIFICATIONS

Phthalate Free
FloorScore Certified
ISO 9001

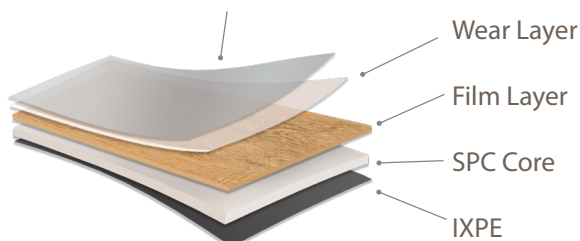## CONTACT & SAMPLES

For further information and sample requests:
www.terralegno.com
info@terralegno.com
P: 800-393-7424

INFINITI LVT CONSTRUCTION

Urethane & Ceramic Bead Finish

Wear Layer

Film Layer

SPC Core

IXPE

Product Page & Visualizer

Infiniti Collection