



Infiniti

RIGID CORE LVT

Pure Taupe



Pure Taupe

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship

Dimensions: 8 2/3" x 74" x 6.5mm

SPC Core Dimensions: 5.5mm

Commercial Wear Layer: 0.5mm / 20mil

Top-Coat Finish: Polyurethane w/ Ceramic Beads

Embossed: Yes

Standard Backing: 1mm IXPE Rubber w/sound properties

Methods: Drop & Lock / Glueless

Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents

Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terraleigno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure

Lifetime Limited Waterproof

Lifetime Limited Petproof

Lifetime Limited Residential Wear

30 Year Limited Commercial Wear



CERTIFICATIONS

Phthalate Free

FloorScore Certified

ISO 9001

CONTACT & SAMPLES

For further information and sample requests:


www.terraleigno.com

info@terraleigno.com

P: 800-393-7424

INFINITI LVT CONSTRUCTION

Urethane & Ceramic Bead Finish

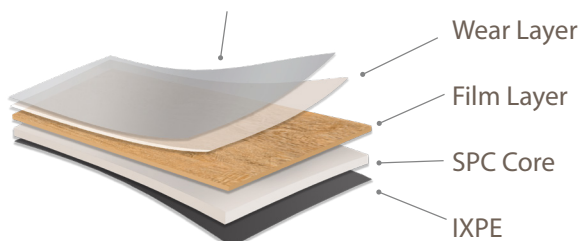

Product Page
& Visualizer



Infiniti
Collection

