



terra | legno
ENGINEERED FOR LIFE
ENGINEERED FOR PERFORMANCE



Desert Sand

Neuvo Classico Collection

North American Oak Saw Cut
Prefinished Engineered Flooring
Wide Plank, Herringbone & Chevron



DESERT SAND

SPECIFICATIONS

Species: *North American Oak*
Janka Hardness: 1360
Cut: *Saw Cut*
Grade: *Select Prime*
Thickness: 9/16"
Width: 6"
Length: 60% 6'-1/4' 40% 18' - 48"
Wear Layer: 3 mm Sawn Faced
Herringbone Dimension: 9/16" X 5" X 29 1/2"
Chevron: 9/16" X 5" X 24"
Other Custom Sizes Available
Finish: *Neotech UV-Polyurethane With Aluminum Oxide*
Stains & Treatments: *Wire Brush, Double Stain*
Edges: *Micro-Bevel 4-Sided*
Core Construction: *Multi-Ply*

ADDITIONAL OPTIONS

Moldings: *standard flush mount & overlap moldings, custom made to order moldings available*



Stair treads & risers: 36", 42", 48", 60", 72"
Heat vents with damper: *drop-in and flush mount*

SHADE VARIATION & COLOR CHANGE




Shade Variation:
LOW-MED

Color Change:
LOW

Shade Variance: Natural products like wood flooring have inherent color & shade variations. The degree of variation is related to the species and the grading.

Light Sensitivity: Wood flooring is light sensitive. Over time, the color of wood naturally changes when exposed to light. Natural UV light and direct sunlight results in the greatest amount of change. The lighting in the room can affect the color of the wood floor.

Reactive Stains & Light Sensitivity: Wood species with higher tannins, like European White Oak, finished with Reactive Stains inherently have a higher sensitivity to light and color change.

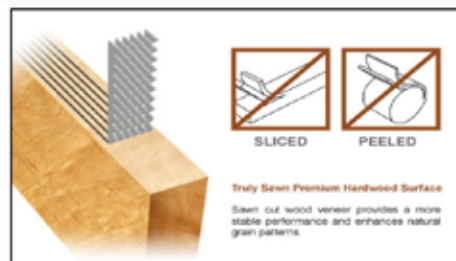

3/4" Solid Hardwood

Engineered



Solid Hardwood = 4mm Wear Layer

terra legno Engineered Flooring offers the exact look and refinishing features of solid wood flooring with superior dimensional stability and performance of engineered construction.

INSTALLATION

Methods: *Staple/ nail down & glue assist, glue & staple/ nail down, glue down, staple & nail down, or float*

Areas: *On grade, below grade & above grade*

For best results, wood floors installed by a wood flooring Professional equal to an NWFA Certified Installer.

CARE & MAINTENANCE

Residential and Commercial Wood Flooring Maintenance with NeoTech Polyurethane Finish. Floor Care and Maintenance details refer to www.terraleigno.com

WARRANTIES

Lifetime Structural Warranty
35 Year Residential Finish Warranty
5 Year Light Commercial Finish Warranty
3 Year Commercial Finish Warranty



CERTIFICATIONS

CARB 2 Compliant
FSC on Request
Lacey Act
LEED Potential Credits

CONTACT & SAMPLES

For further information and sample requests:
www.terraleigno.com
info@terraleigno.com
P: 800-393-7424