

Infiniti

RIGID CORE LVT

Pure Collection

A horizontal rectangular sample of Pure Tan LVT flooring, showing a light tan wood grain pattern with subtle variations in tone and texture.


Pure Tan

A horizontal rectangular sample of Pure Natural LVT flooring, showing a medium tan wood grain pattern with a slightly more pronounced texture than the Pure Tan sample.

Pure Natural

A horizontal rectangular sample of Pure Sephia LVT flooring, showing a medium brown wood grain pattern with a slightly more pronounced texture than the Pure Natural sample.

Pure Sephia

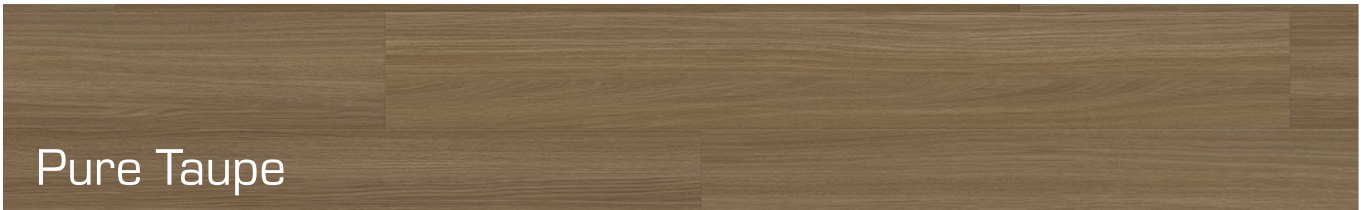A horizontal rectangular sample of Pure Taupe LVT flooring, showing a dark taupe wood grain pattern with a slightly more pronounced texture than the Pure Sephia sample.

Pure Taupe

A horizontal rectangular sample of Pure Brown LVT flooring, showing a dark brown wood grain pattern with a slightly more pronounced texture than the Pure Taupe sample.

Pure Brown

Infiniti Pure by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship

Dimensions: 8 2/3" x 74" x 6.5mm

SPC Core Dimensions: 5.5mm

Commercial Wear Layer: 0.5mm / 20mil

Top-Coat Finish: Polyurethane w/ Ceramic Beads

Embossed: Yes

Standard Backing: 1mm IXPE Rubber w/sound properties

Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents

Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Unilin 2G Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralelegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure

Lifetime Limited Waterproof

Lifetime Limited Petproof

Lifetime Limited Residential Wear

30 Year Limited Commercial Wear



CERTIFICATIONS

Phthalate Free

FloorScore Certified

ISO 9001

CONTACT & SAMPLES


For further information and sample requests:

www.terralelegno.com

info@terralelegno.com

P: 800-393-7424

INFINITI LVT CONSTRUCTION

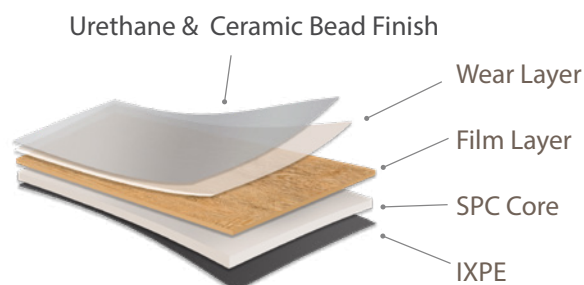

Infiniti
Collection



Room
Visualizer





Infiniti

RIGID CORE LVT

Pure Natural



Pure Natural

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship
Dimensions: 8 2/3" x 74" x 6.5mm
SPC Core Dimensions: 5.5mm
Commercial Wear Layer: 0.5mm / 20mil
Top-Coat Finish: Polyurethane w/ Ceramic Beads
Embossed: Yes
Standard Backing: 1mm IXPE Rubber w/sound properties
Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents
Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet
Dimensional Stability: ASTM F2199 - PASSED
Heat Stability: ASTM 1514 - PASSED
Light Stability: ASTM 1515 - PASSED
Residual Indentation: ASTM F1914 - PASSED
Static Load: ASTM F970 - PASSED
Stain Resistance: ASTM F925 - PASSED
Slip Resistance (Static Coefficient of Friction): ≥ 0.5
Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45
Impact Sound Testing: IICc-28 Δ IIC = 23db
STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62
IIC Sound Testing: ASTM E 492-09 (2016) – IIC 65
Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Unilin 2G Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralelegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure
Lifetime Limited Waterproof
Lifetime Limited Petproof
Lifetime Limited Residential Wear
30 Year Limited Commercial Wear



CERTIFICATIONS

Phthalate Free
FloorScore Certified
ISO 9001

CONTACT & SAMPLES

For further information and sample requests:
www.terralelegno.com
info@terralelegno.com
P: 800-393-7424

INFINITI LVT CONSTRUCTION



Product Page
& Visualizer



Infiniti
Collection





Infiniti

RIGID CORE LVT

Pure Sephia



Pure Sephia

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship

Dimensions: 8 2/3" x 74" x 6.5mm

SPC Core Dimensions: 5.5mm

Commercial Wear Layer: 0.5mm / 20mil

Top-Coat Finish: Polyurethane w/ Ceramic Beads

Embossed: Yes

Standard Backing: 1mm IXPE Rubber w/sound properties

Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents

Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Unilin 2G Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralelegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure
Lifetime Limited Waterproof
Lifetime Limited Petproof
Lifetime Limited Residential Wear
30 Year Limited Commercial Wear




CERTIFICATIONS

Phthalate Free
FloorScore Certified
ISO 9001

CONTACT & SAMPLES

For further information and sample requests:
www.terralelegno.com
info@terralelegno.com
P: 800-393-7424

INFINITI LVT CONSTRUCTION

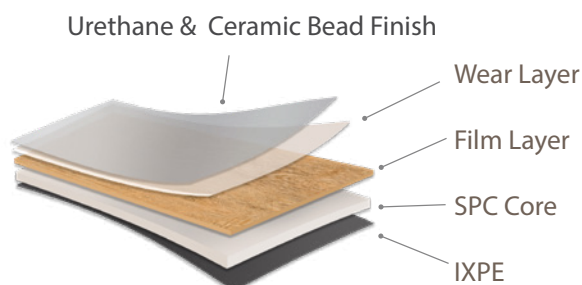

Product Page
& Visualizer



Infiniti
Collection





Infiniti

RIGID CORE LVT

Pure Tan



Pure Tan

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship

Dimensions: 8 2/3" x 74" x 6.5mm

SPC Core Dimensions: 5.5mm

Commercial Wear Layer: 0.5mm / 20mil

Top-Coat Finish: Polyurethane w/ Ceramic Beads

Embossed: Yes

Standard Backing: 1mm IXPE Rubber w/sound properties

Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents

Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Unilin 2G Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralelegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure
Lifetime Limited Waterproof
Lifetime Limited Petproof
Lifetime Limited Residential Wear
30 Year Limited Commercial Wear




CERTIFICATIONS

Phthalate Free
FloorScore Certified
ISO 9001

CONTACT & SAMPLES

For further information and sample requests:
www.terralelegno.com
info@terralelegno.com
P: 800-393-7424

INFINITI LVT CONSTRUCTION

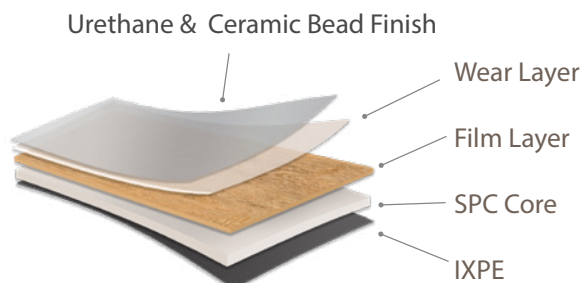

Product Page
& Visualizer



Infiniti
Collection





Infiniti

RIGID CORE LVT

Pure Brown



Pure Brown

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship

Dimensions: 8 2/3" x 74" x 6.5mm

SPC Core Dimensions: 5.5mm

Commercial Wear Layer: 0.5mm / 20mil

Top-Coat Finish: Polyurethane w/ Ceramic Beads

Embossed: Yes

Standard Backing: 1mm IXPE Rubber w/sound properties

Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents

Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Unilin 2G Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralelegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure
Lifetime Limited Waterproof
Lifetime Limited Petproof
Lifetime Limited Residential Wear
30 Year Limited Commercial Wear




CERTIFICATIONS

Phthalate Free
FloorScore Certified
ISO 9001

CONTACT & SAMPLES

For further information and sample requests:
www.terralelegno.com
info@terralelegno.com
P: 800-393-7424

INFINITI LVT CONSTRUCTION

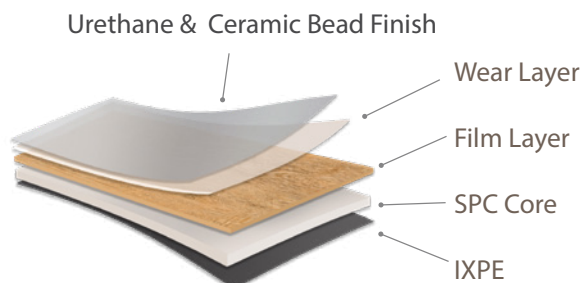

Product Page
& Visualizer



Infiniti
Collection





Infiniti

RIGID CORE LVT

Pure Taupe



Pure Taupe

Infiniti Pure Collection by terra legno

SPECIFICATIONS

Quick-Ship: This product is Quick-Ship

Dimensions: 8 2/3" x 74" x 6.5mm

SPC Core Dimensions: 5.5mm

Commercial Wear Layer: 0.5mm / 20mil

Top-Coat Finish: Polyurethane w/ Ceramic Beads

Embossed: Yes

Standard Backing: 1mm IXPE Rubber w/sound properties

Moldings: Over-Lap Reducer, T-Molding, Flush Stair Nosing, ¼ Round, Heat Vents

Packaging: 21.30 SF/carton, 5 planks per carton, 44 cartons/pallet

Dimensional Stability: ASTM F2199 - PASSED

Heat Stability: ASTM 1514 - PASSED

Light Stability: ASTM 1515 - PASSED

Residual Indentation: ASTM F1914 - PASSED

Static Load: ASTM F970 - PASSED

Stain Resistance: ASTM F925 - PASSED

Slip Resistance (Static Coefficient of Friction): ≥ 0.5

Fire Performance (Critical Radiant Flux): ASTM E648 – CLASS 1, ≥ 0.45

Impact Sound Testing: IICc-28 Δ IIC = 23db

STC Sound Testing: ASTM E 90-2009 (R2016) – STC 62

IIC Sound Testing: ASTM E 492-09 (2016)– IIC 65

Classification: ASTM F-3261-17 Resilient flooring in modular format with Rigid Polymeric Core

INSTALLATION

Methods: Unilin 2G Drop & Lock / Glueless

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit www.terralelegno.com or contact Terra Legno, Ltd. at 800-973-7424

WARRANTIES

Lifetime Limited Structure
Lifetime Limited Waterproof
Lifetime Limited Petproof
Lifetime Limited Residential Wear
30 Year Limited Commercial Wear




CERTIFICATIONS

Phthalate Free
FloorScore Certified
ISO 9001

CONTACT & SAMPLES

For further information and sample requests:
www.terralelegno.com
info@terralelegno.com
P: 800-393-7424

INFINITI LVT CONSTRUCTION

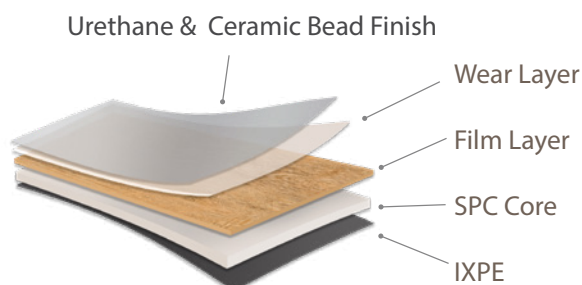

Product Page
& Visualizer



Infiniti
Collection

